



Blackboards

Cover entire available room front (projection wall) (i.e. more is better)
Chalk tray is standard

Sections 4'x8' standard, with seamless joint

Flat floor rooms:

Minimum 16" boards at room front (2 sections joined)

Tiered rooms:

Minimum 16', prefer 24' width of boards at room front

Double-hung boards (vertically stacked boards)

2 Boards high / 2 boards deep: One board goes up, other board comes down

Standard is sections 4'x8' for stacking boards

Vertical stacked boards 4x16' allowed if tender specifies a "tension idler" balance such as used by Architectural School Products. If supplier/mechanism not assured, use stacked 8' wide boards
Chalk tray to be stationary (NOT raise/lower)

Skills / Workshop rooms (or if specified):

Blackboards all room walls, full wall, single tier

Mounting

Mount 3' from floor

Blocking behind drywall: Minimum 3.5" high strip located with top edge at 7' from floor

Lighting

see lighting standards

Options

Tack rail along top edge (cork strip)

Provisioning


*depends on project. Suggested provisioning:

Client supplies boards

Contractor installs boards



offset screen, standard blackboards
presentation wall

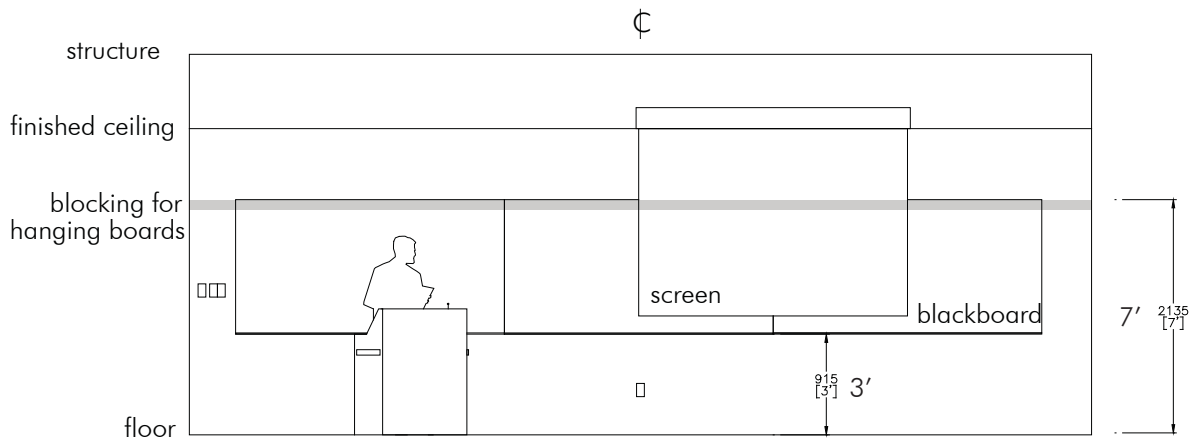

multiple screens, double-hung blackboards
presentation wall

